


FENDER "TWIN-AMP" SCHEMATIC

MODEL 6G8-A K-FJ

NOTICE

- 1- VOLTAGES READ TO GROUND WITH ELECTRONIC VOLTMETER. VALUES SHOWN + OR - 20%
- 2- ALL RESISTORS 1/2 WATT, 10% TOLERANCE IF NOT SPECIFIED.
- 3- ALL CAPACITORS AT LEAST 400 VOLT RATING IF NOT SPECIFIED.

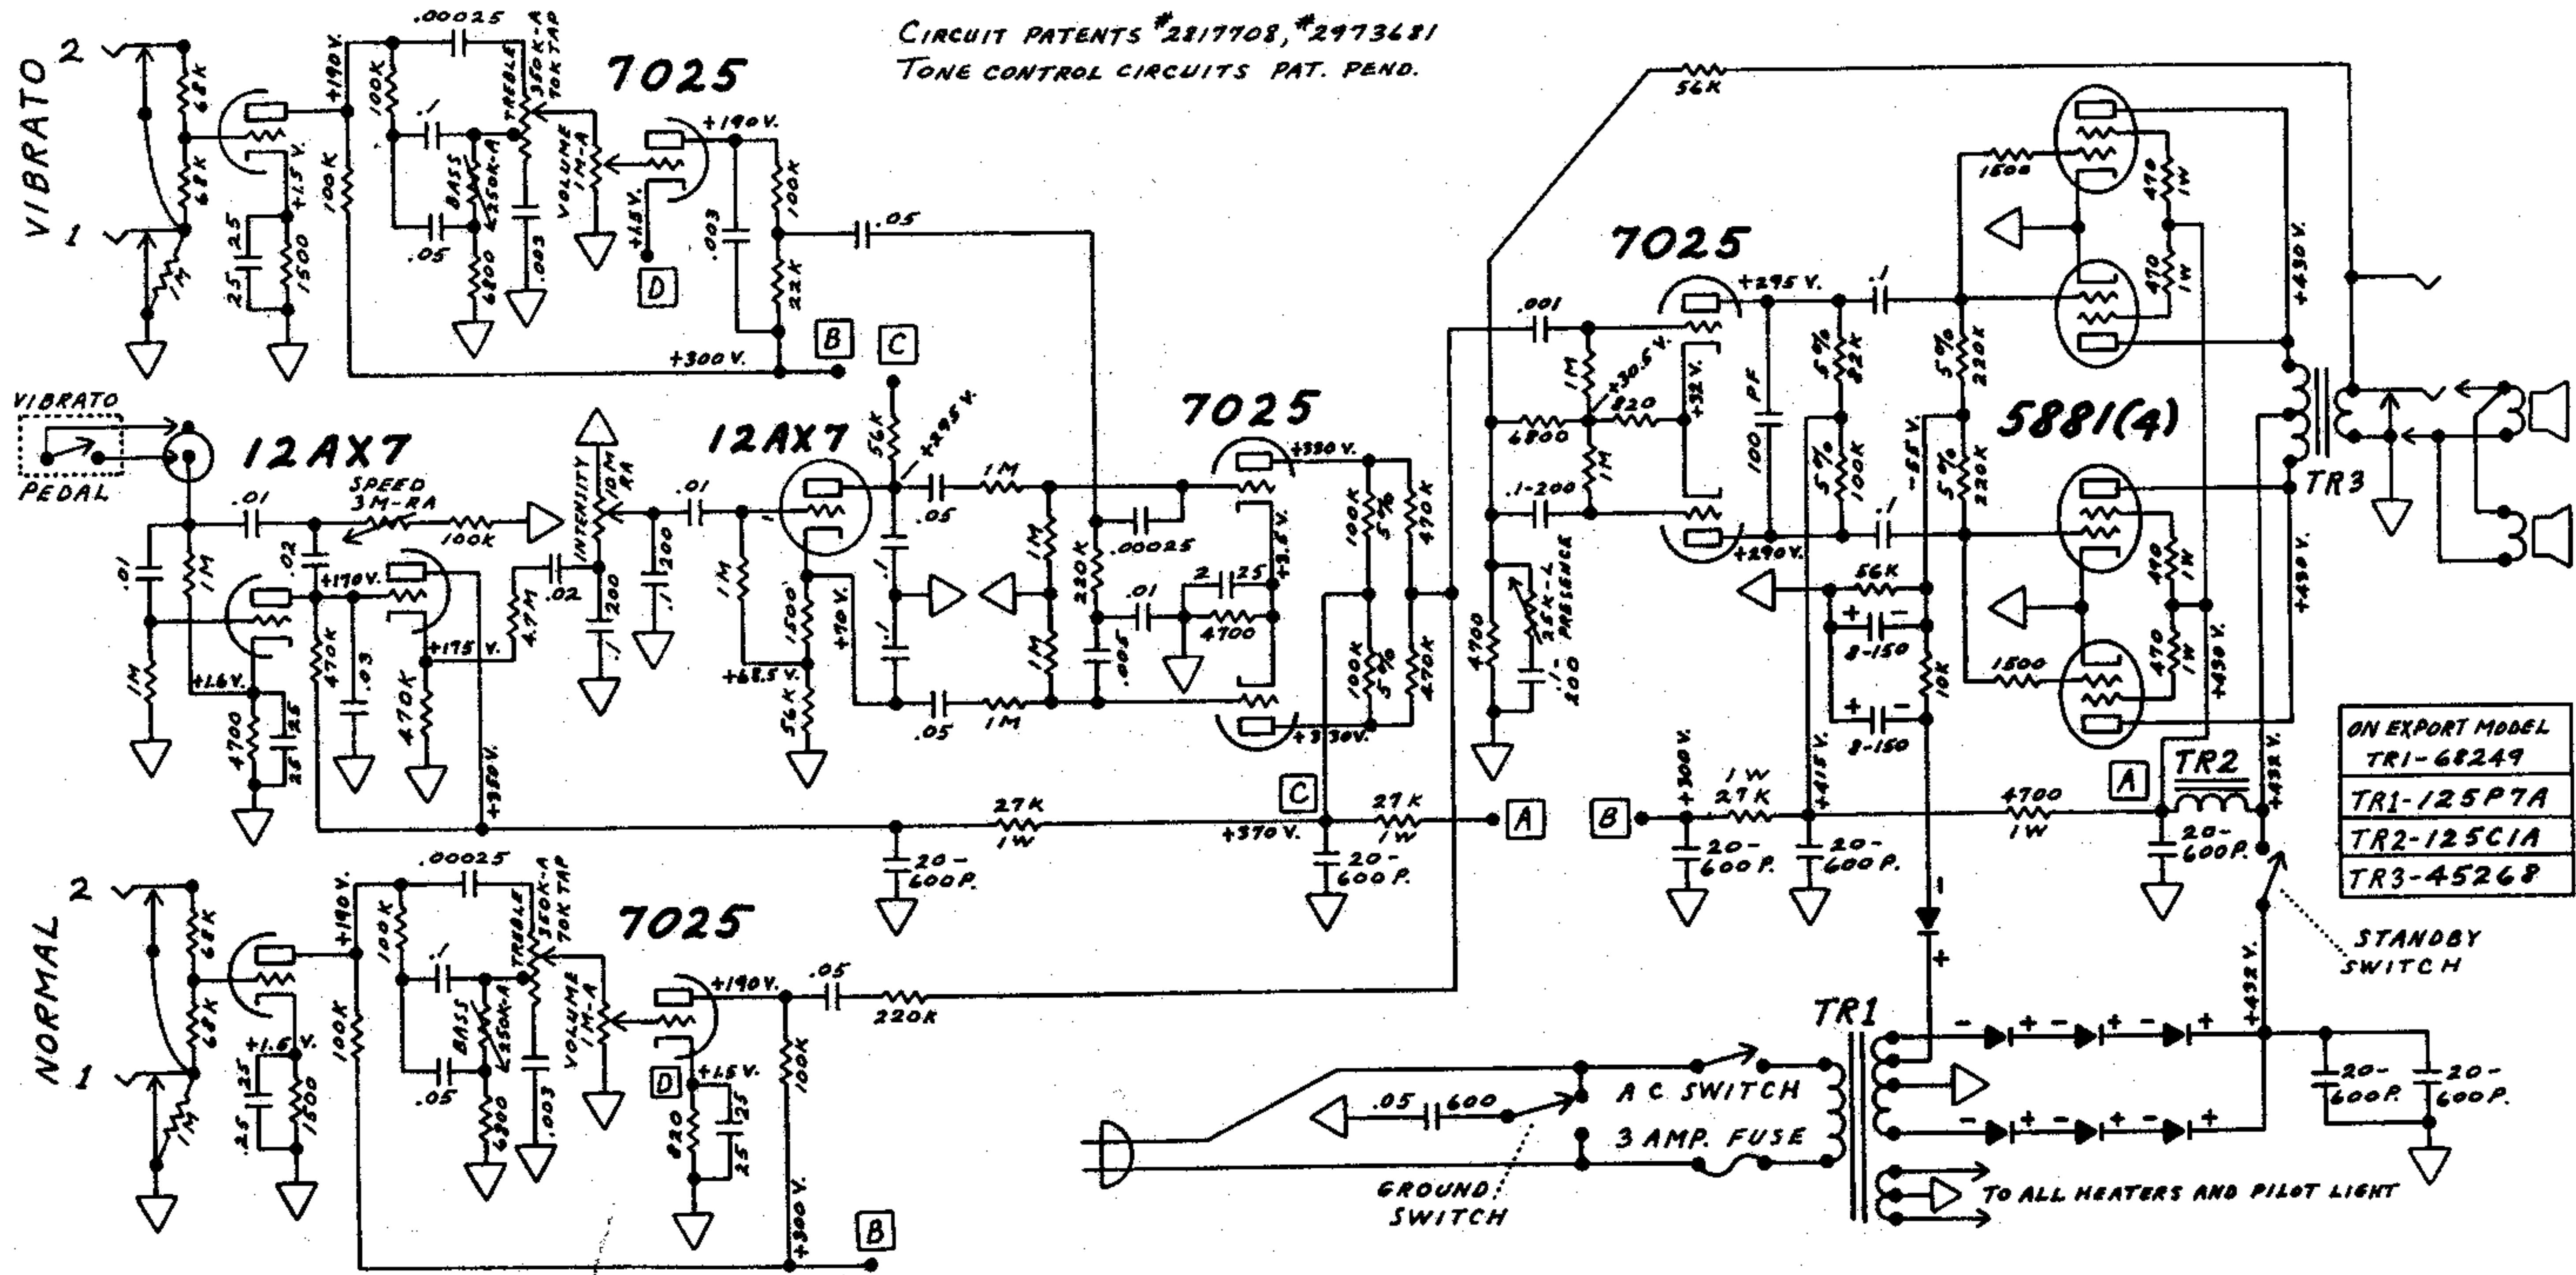

CIRCUIT PATENTS #2817708, #2973681
TONE CONTROL CIRCUITS PAT. PEND.

ON EXPORT MODEL
TR1-68249
TR1-125P7A
TR2-125C1A
TR3-45268

STANDBY SWITCH


GROUND SWITCH
A.C. SWITCH
3 AMP. FUSE
TO ALL HEATERS AND PILOT LIGHT

FENDER "TWIN-AMP" LAYOUT

MODEL 6G8-A

NOTICE

VOLTAGES READ TO GROUND WITH ELECTRONIC VOLTMETER. VALUES SHOWN \pm OR - 20%

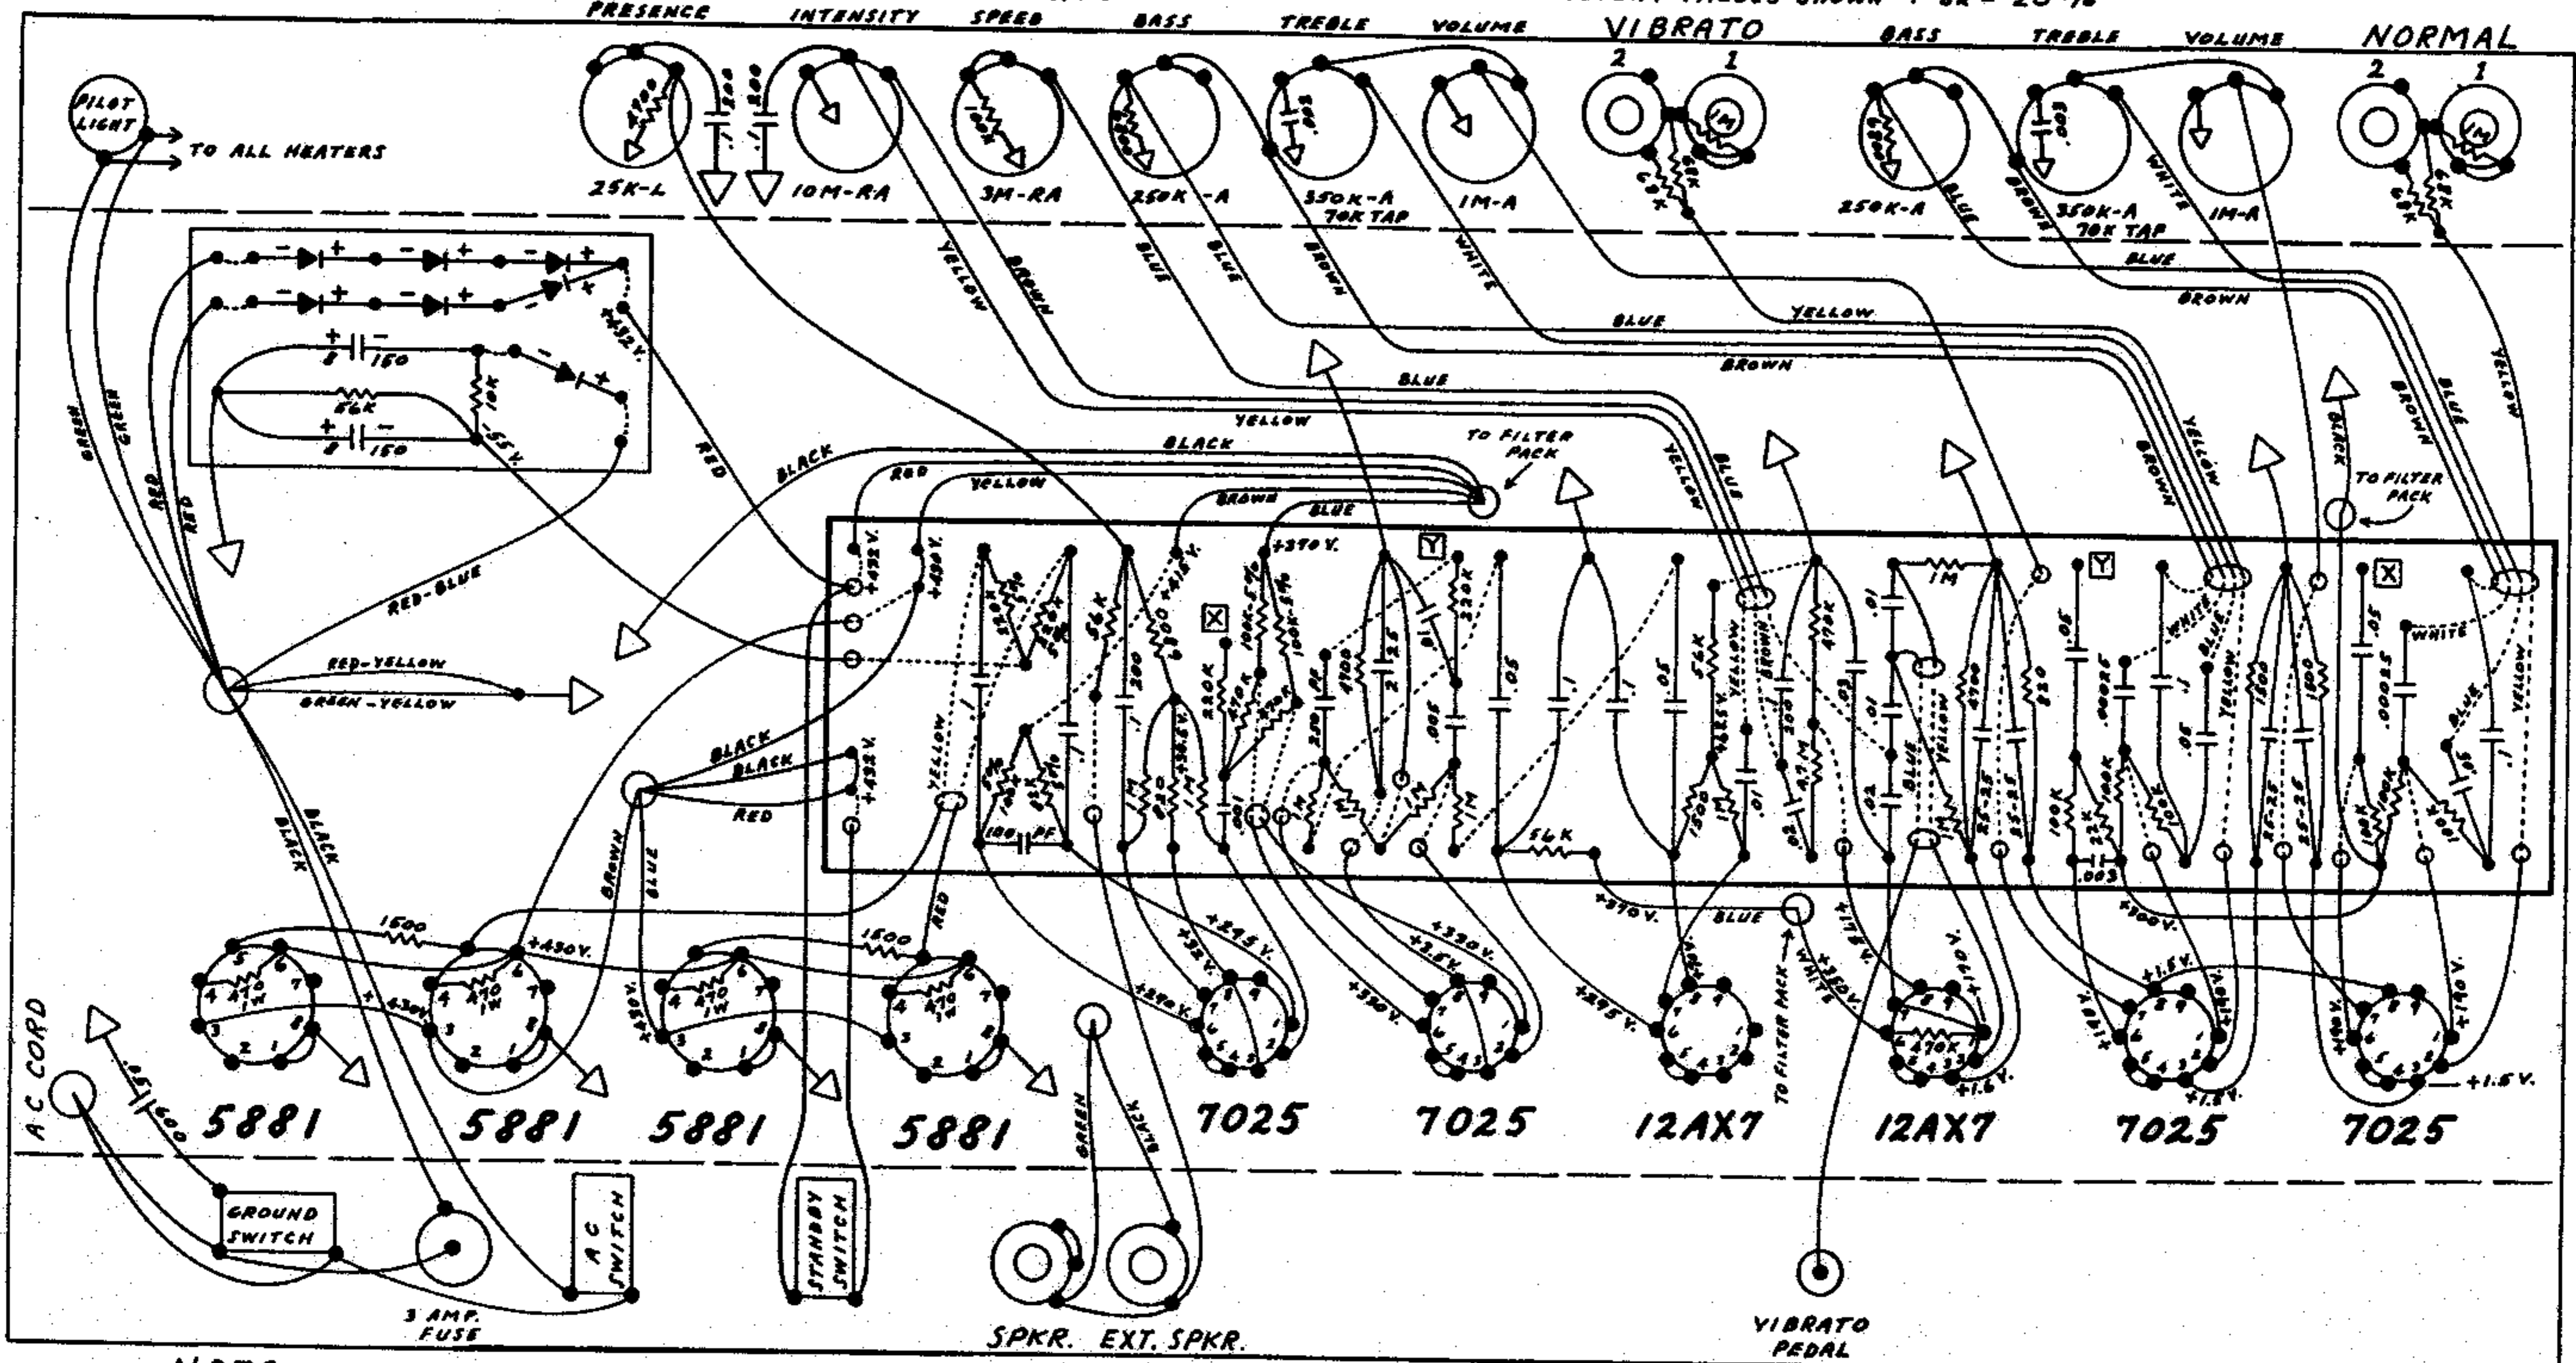

NOTE - ALL RESISTORS 1/2 WATT, 10% TOLERANCE, IF NOT SPECIFIED.

NOTE - ALL CAPACITORS AT LEAST 400 VOLT RATING IF NOT SPECIFIED.