

# WIRING DIAGRAM FOR LES PAUL®




**Directions:** Tie white & green wires together (Ground) and solder to volume pot. Take orange wires (hot) and connect to switch where noted by blue arrows.

**Note:** All Lead wires are on the same side as the high "E" lead string.

500K pots recommended for better tone.  
 .022mfd cap for brighter tone  
 or use: .047mfd cap for darker tone

**HUMBUCKER PICKUPS**  
 LACE SENSOR DUALY  
 LACE CONVERTABLE  
 LACE D-100  
 LACE D-150  
 LACE TRANSENSOR

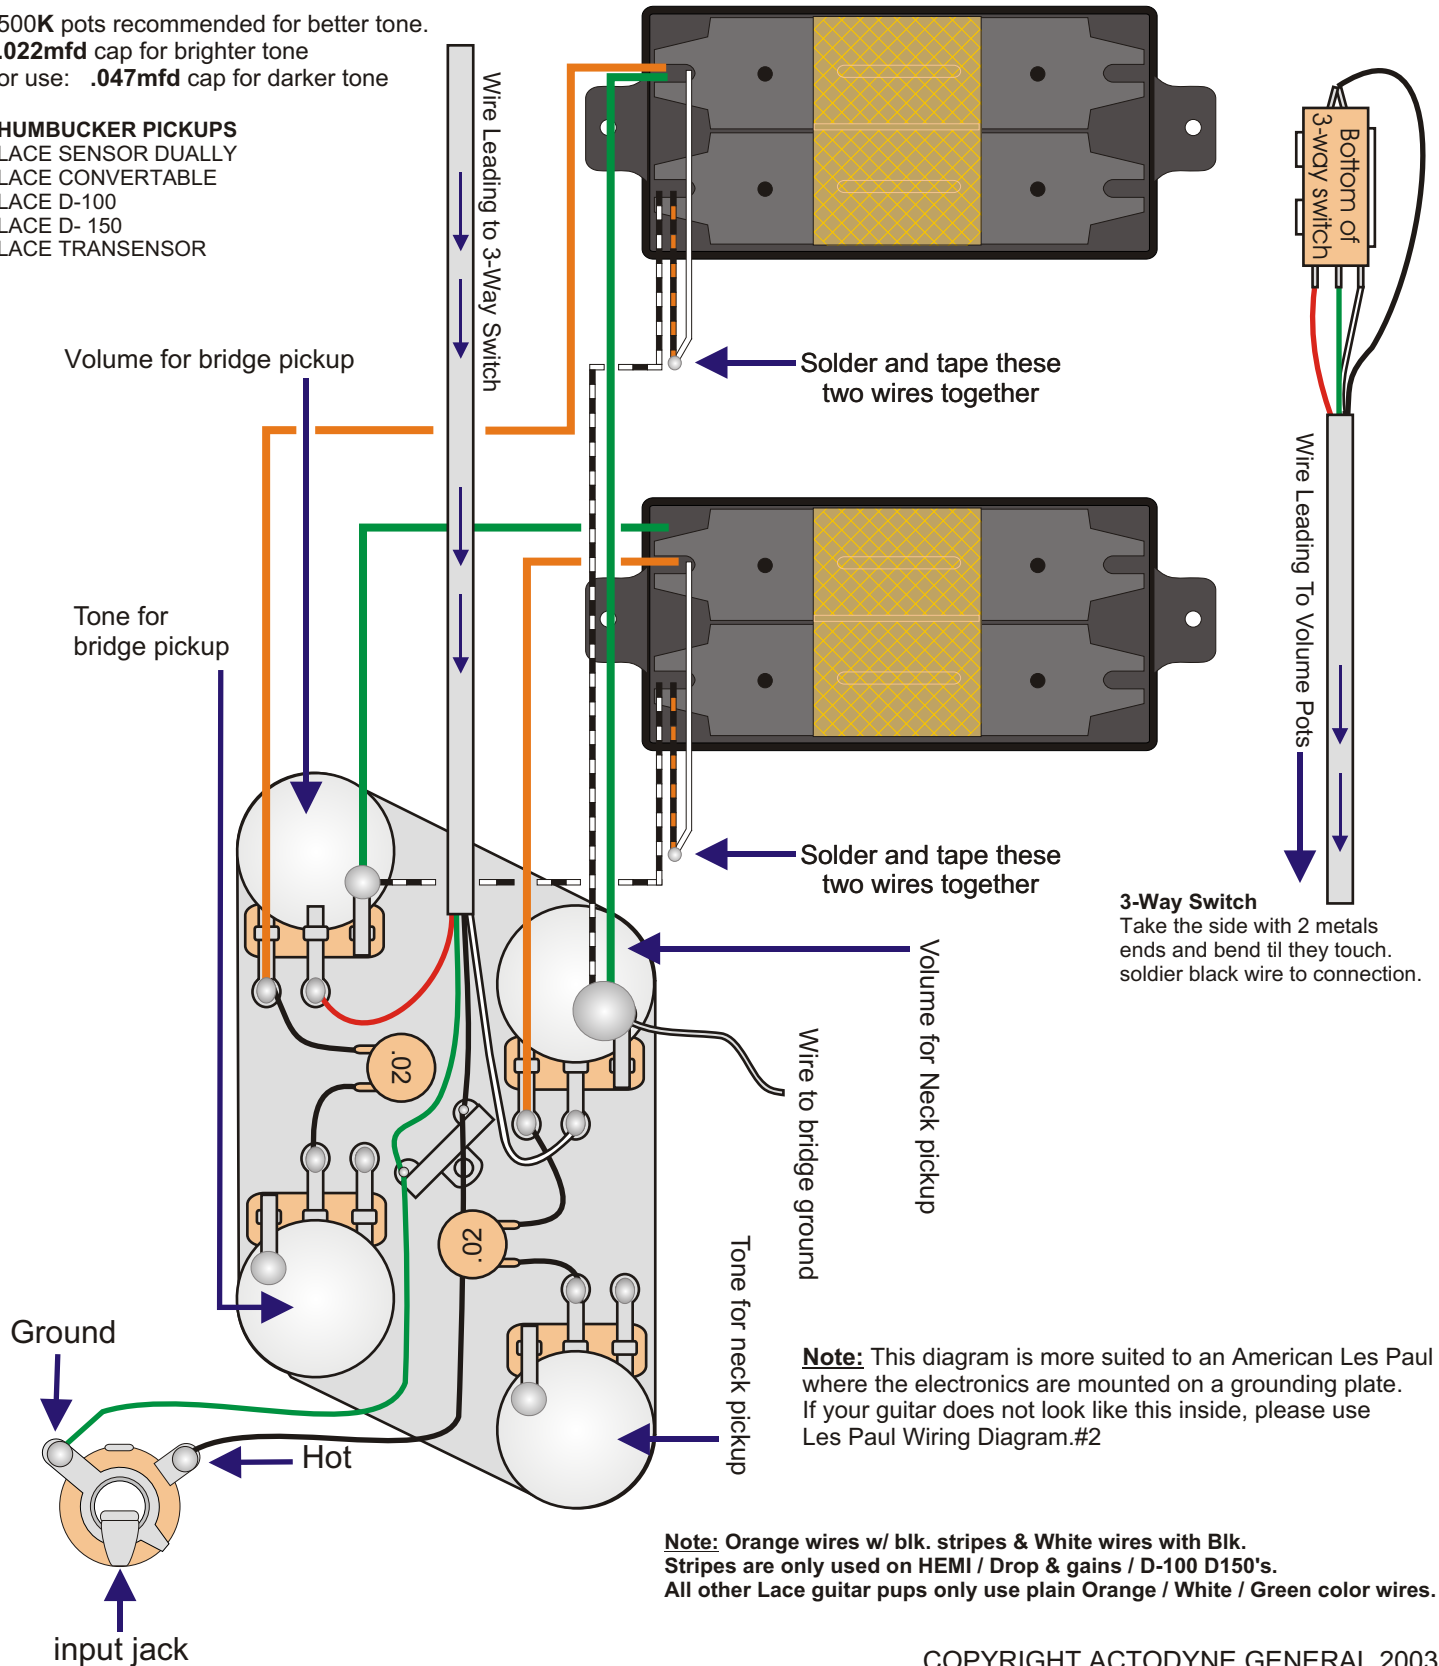

**Note:** This diagram is more suited to an American Les Paul where the electronics are mounted on a grounding plate. If your guitar does not look like this inside, please use Les Paul Wiring Diagram.#2

**Note:** Orange wires w/ blk. stripes & White wires with Blk. Stripes are only used on HEMI / Drop & gains / D-100 D150's. All other Lace guitar pups only use plain Orange / White / Green color wires.